

SPECIAL NOTICE


TERMINAL AREA GRAPHIC NOTICE  
(Not to be used for navigation)

Bowman Airport runway 24 and 32 VFR Departure Procedure .

“SENECA DEPARTURE”

PILOTS SHOULD SPECIFICALLY REQUEST THIS PROCEDURE USING THE ABOVE NAME.

ATIS 112.2  
LOUISVILLE APP CON  
124.5 306.2  
BOWMAN TOWER  
119.5 248.2  
GND CON  
121.8  
CLNC DEL  
118.9

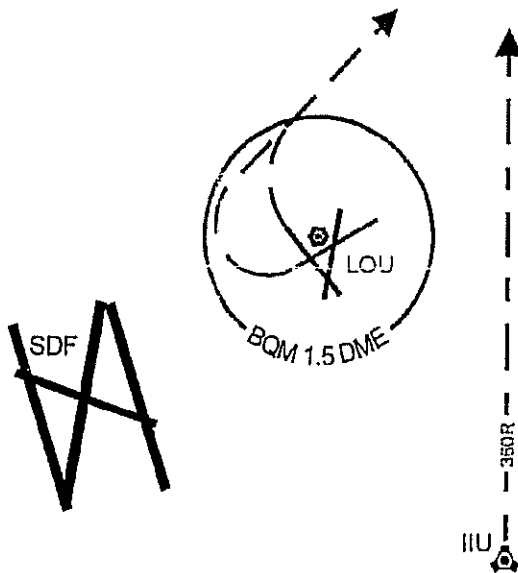

Remaining within 1 1/2 miles from Bowman VCR (BQM), turn right heading 045, maintaining VFR at or below 2500 feet. Expect IFR activation and climb upon crossing the IIU 360 radial.

WEATHER MINIMUMS: Ceiling 3000 and visibility 3 miles.

NOTE: Receipt of a clearance to climb above 2500 feet constitutes activation of IFR clearance upon leaving 2500 feet.